


PYTHON HOIST C

APPLICATION INFORMATION

breaking strength	●●●●○
bending performance	●●●●○
drum crush resistance	●●●●○
abrasion resistance	●●●●○
lateral pressure stability	●●●●○

rotation resistant	yes
use with swivel	yes
rec. max fleet angle	2,0°
multi layer suited	yes

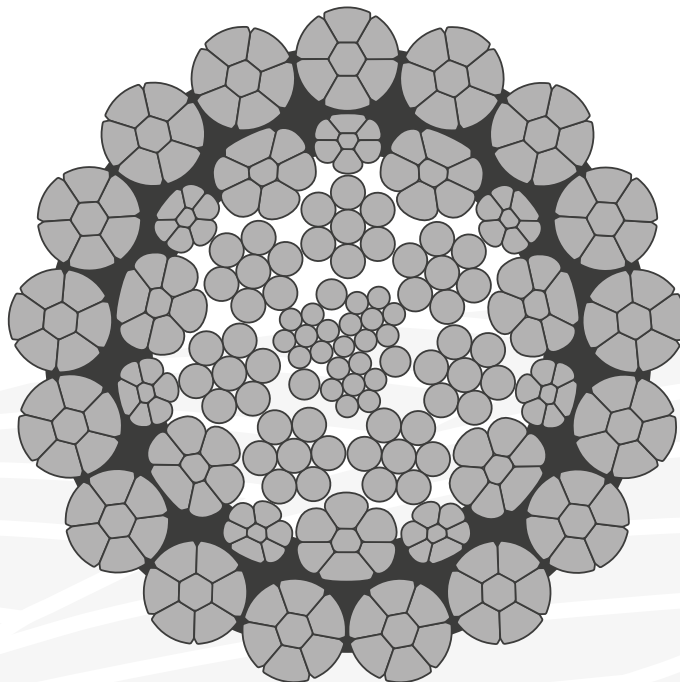

HIPAC



PLASTGUARD

ROTATION RESISTANT

ROPE CHARACTERISTICS

Flexible high strength hoist rope for offshore cranes and deck cranes. The PlastGuard protection makes this rope less sensitive to high fleet angles. The ForcePac'd core in connection with the HiPac compacted outer layer provide very good pressure resistance on multi layer drums. An in-house developed long lasting lubrication formula protects the rope during long idle times.

construction 41(W)xK7-EPKWSC	number of wires 291	load bearing outer wires 119
number of strands 41	manufacturing tolerance +2% / +4%	available in regular- / lang lay

Nominal diameter [mm/inch]	Mass weight [kg/100m]	Minimum breaking load	
		1960 N/mm ² [kN]	2160 N/mm ² [kN]
12	68,4	136	143
1/2"	74,9	151	158
13	78,0	153	163
14	89,3	179	188
9/16"	94,2	190	199
15	103,9	208	218
5/8"	117,3	236	247
16	118,7	237	248
17	133,1	262	279
18	150,0	300	315
19	169,5	338	355
3/4"	169,5	338	355
20	186,9	374	392
21	205,8	412	432
22	224,7	450	472
7/8"	229,6	461	484
23	248,5	497	516
24	272,3	543	559
25	294,7	580	612
1"	302,7	608	638
26	317,0	633	664
27	340,5	679	713
28	364,0	726	761
1-1/8"	381,4	767	804
29	389,6	778	816
30	415,2	830	870
31	442,2	883	926
1-1/4"	466,3	931	976
32	469,2	937	982
33	499,8	999	1.047
34	530,4	1.061	1.112
1-3/8"	564,8	1.128	1.183
35	565,9	1.130	1.185
36	601,4	1.200	1.258
38	659,8	1.318	1.382
1-1/2"	668,9	1.328	1.386
40	731,7	1.461	1.532
1-5/8"	780,0	1.558	1.634
42	817,7	1.635	1.714
44	898,9	1.795	1.882
1-3/4"	908,1	1.813	1.901
46	988,9	1.974	2.070
1-7/8"	1.030,5	2.060	2.160
48	1.044,8	2.091	2.193

HIGHER DIAMETERS AND BREAKING LOADS ON REQUEST