


COMPLEMENTARY ROPE CONSTRUCTIONS


PYTHON 6 WSV

Highly flexible ForcePac compacted rope for use in applications with increased bending fatigue requirements over 6 SV. Perfectly suited as tubing line and boom hoist line on a crawler crane.

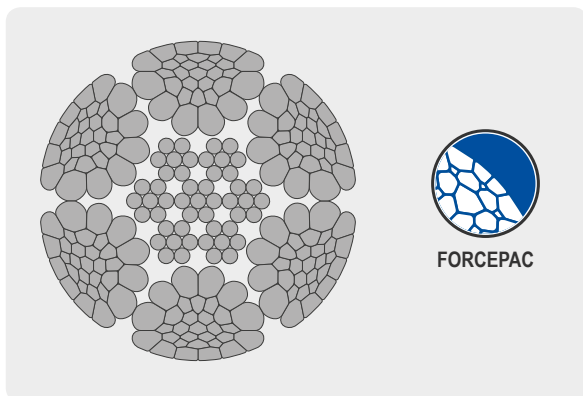

PYTHON 6 R+F

Versatile six strand ForcePac compacted rope with a very round surface and optimized bending / abrasion performance. Applicable as all purpose logging rope, climbing rope for snow groomers, flying fox rope in high rope courses and many other applications.

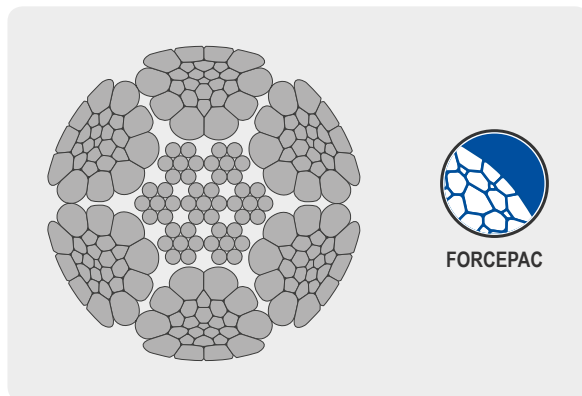

| Nominal diameter [mm/inch] | Mass weight [kg/100m] | Minimum breaking load |
|-------------------------------|--------------------------|--------------------------------|
| | | 1960 N/mm ² [kN] |
| 10 | 55,4 | 96 |
| 11 | 65,5 | 121 |
| 7/16" | 66,2 | 122 |
| 12 | 76,4 | 132 |
| 1/2" | 83,6 | 147 |
| 13 | 88,1 | 157 |
| 14 | 101,0 | 189 |
| 9/16" | 103,0 | 193 |
| 15 | 114,0 | 204 |
| 5/8" | 127,9 | 239 |
| 16 | 129,0 | 241 |
| 18 | 159,0 | 290 |
| 19 | 185,0 | 334 |
| 3/4" | 185,5 | 335 |
| 20 | 193,0 | 346 |
| 22 | 231,0 | 440 |
| 7/8" | 233,4 | 445 |
| 1" | 320,4 | 534 |
| 26 | 328,0 | 547 |
| 28 | 353,0 | 674 |
| 1-1/8" | 360,2 | 688 |
| 30 | 415,0 | 803 |
| 1-1/4" | 460,0 | 819 |

| Nominal diameter [mm/inch] | Mass weight [kg/100m] | Minimum breaking load |
|-------------------------------|--------------------------|--------------------------------|
| | | 1960 N/mm ² [kN] |
| 8 | 37,0 | 68 |
| 9 | 46,0 | 83 |
| 3/8" | 50,7 | 91 |
| 10 | 55,0 | 99 |
| 11 | 65,0 | 122 |
| 7/16" | 65,6 | 123 |
| 12 | 76,0 | 141 |
| 1/2" | 83,3 | 154 |
| 13 | 88,0 | 163 |
| 14 | 101,0 | 186 |
| 9/16" | 105,9 | 195 |
| 15 | 114,0 | 211 |
| 5/8" | 124,4 | 229 |
| 16 | 129,0 | 237 |
| 18 | 159,0 | 295 |
| 19 | 176,0 | 316 |
| 3/4" | 176,5 | 317 |
| 20 | 193,0 | 353 |
| 22 | 231,0 | 423 |
| 7/8" | 233,4 | 427 |
| 24 | 272,0 | 487 |